Samsung S85 Screen Replacement

This guide will explain how to successfully remove the screen underneath the outside shell and on top of the circuit board.

Written By: Avinash Salgam





INTRODUCTION

This guide will explain how to successfully remove the screen underneath the outside shell and on top of the circuit board.

TOOLS:


- Tweezers (1)
- Phillips #00 Screwdriver (1)

Step 1 — Screen

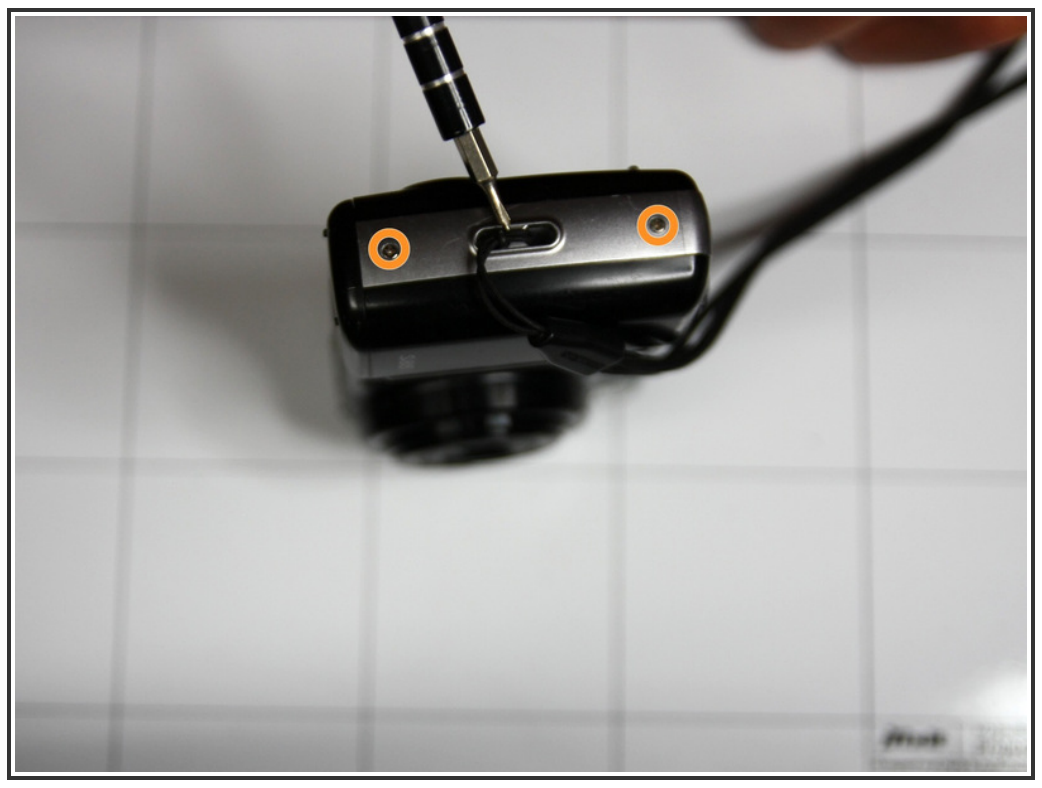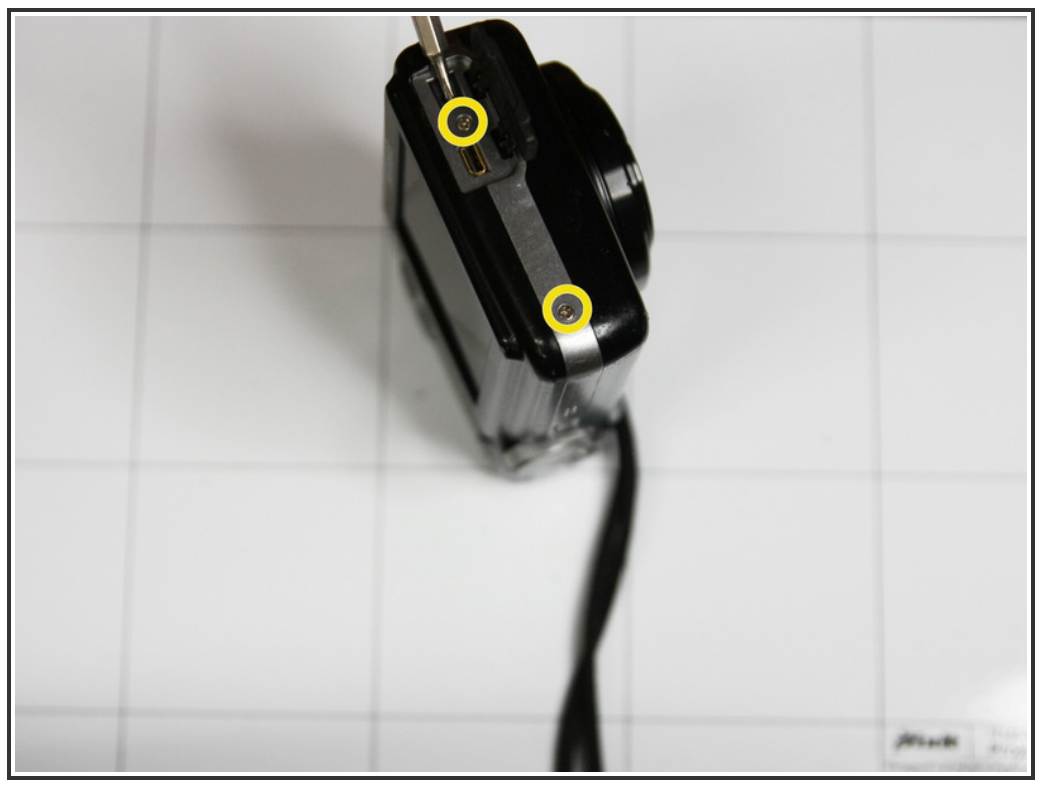
- Remove 4 screws from bottom of camera
- Remove 2 screws from side of camera
- Remove 2 screws from side of camera
  - Place Screws on magnetic surface or location where they will not roll away

Step 2

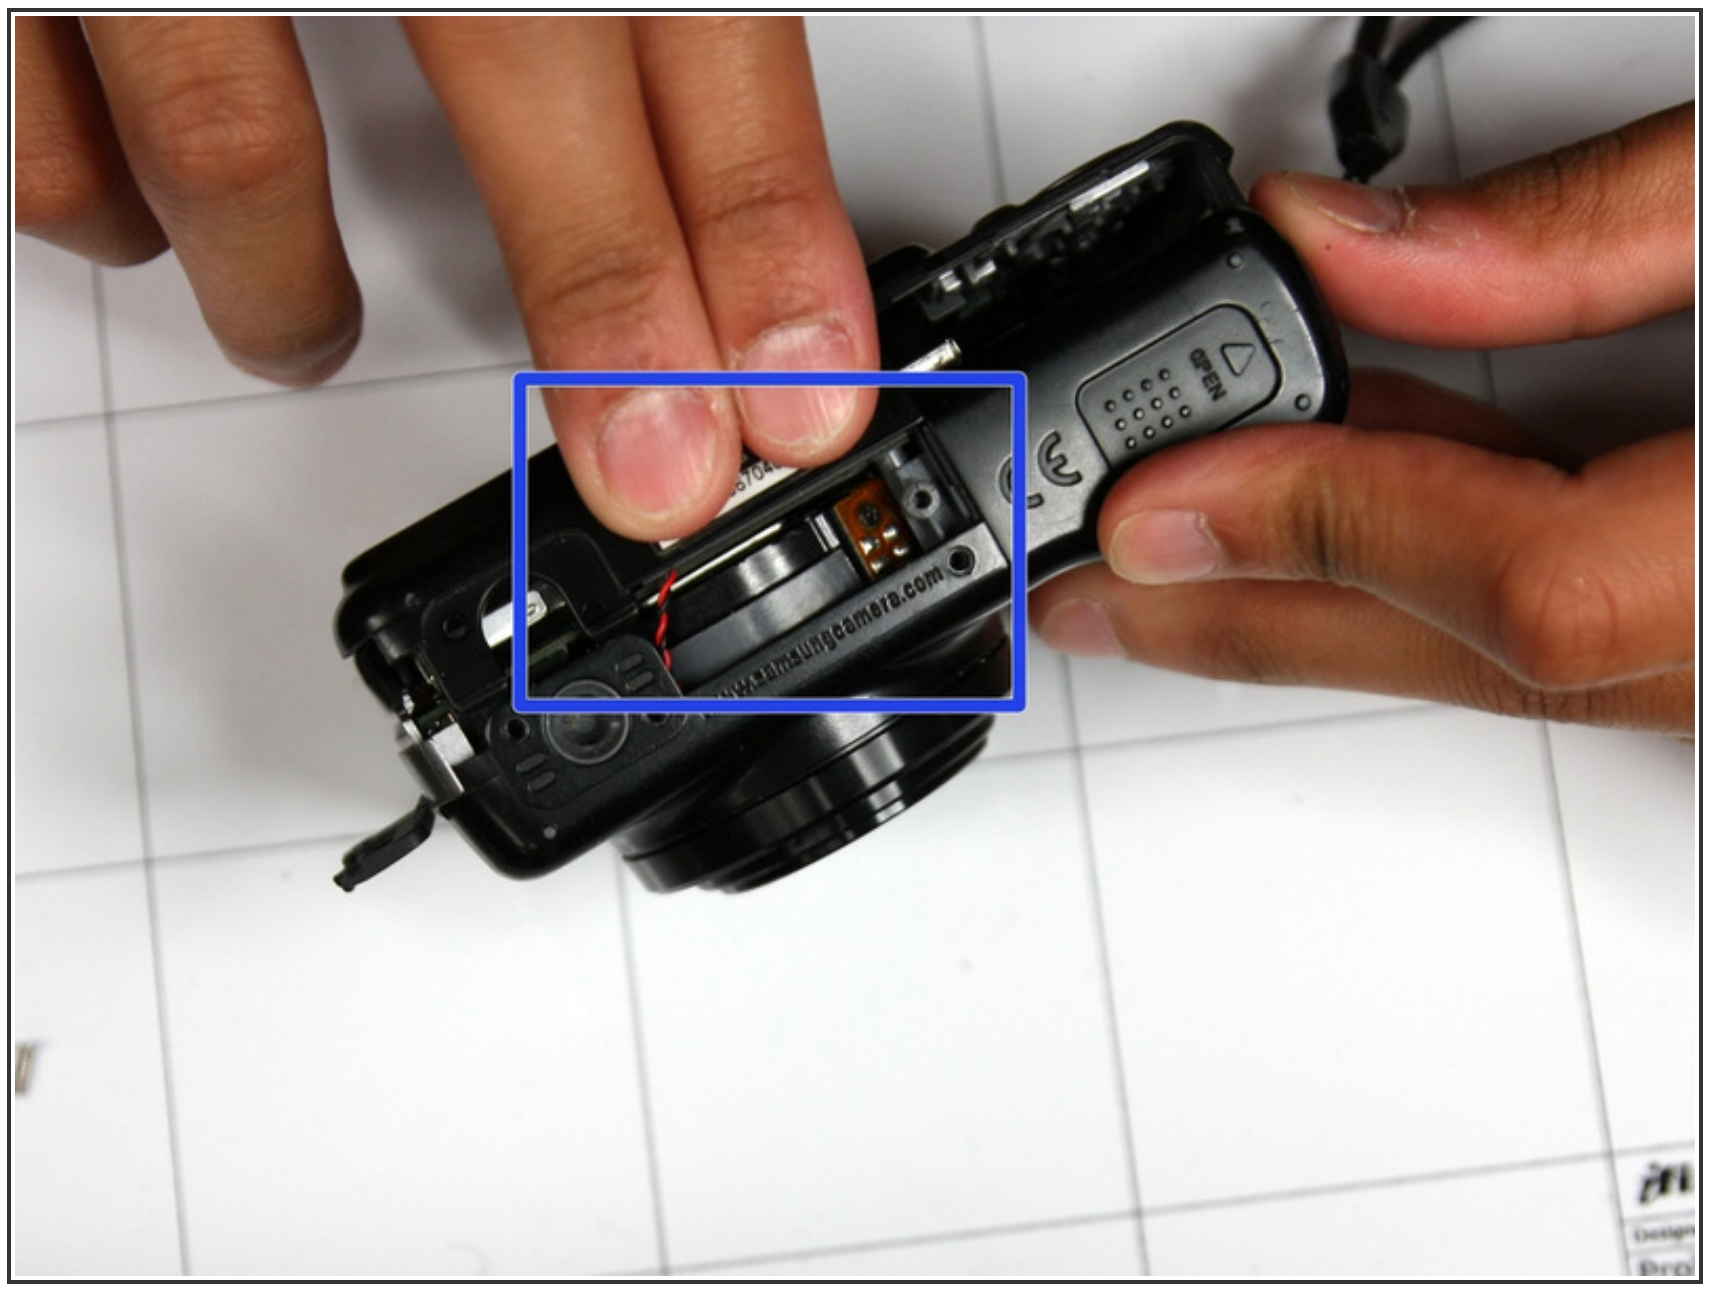


- Squeeze area noted by blue square and pull outside shell apart from remaining camera.


Step 3

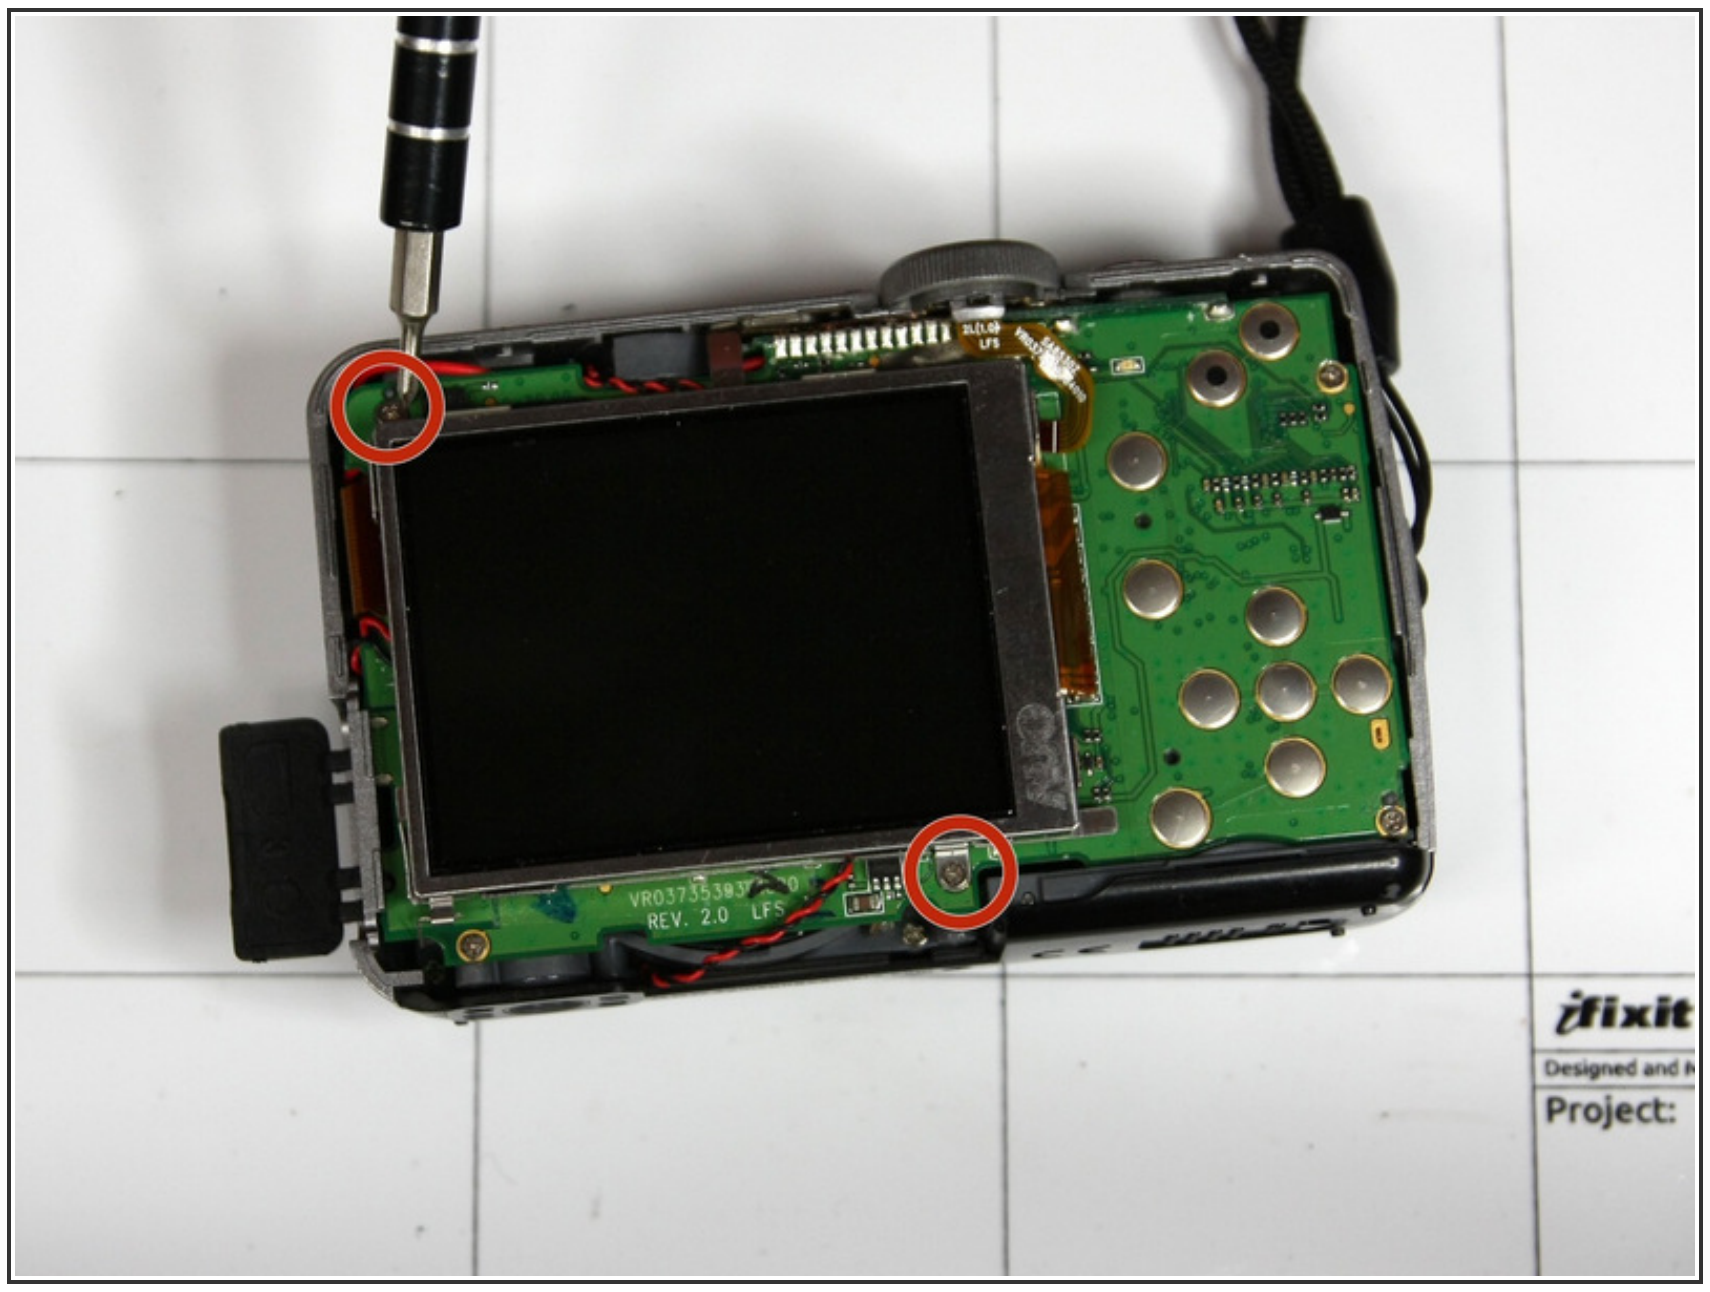


- Remove two screws holding screen to circuit board marked by red circles

Step 4

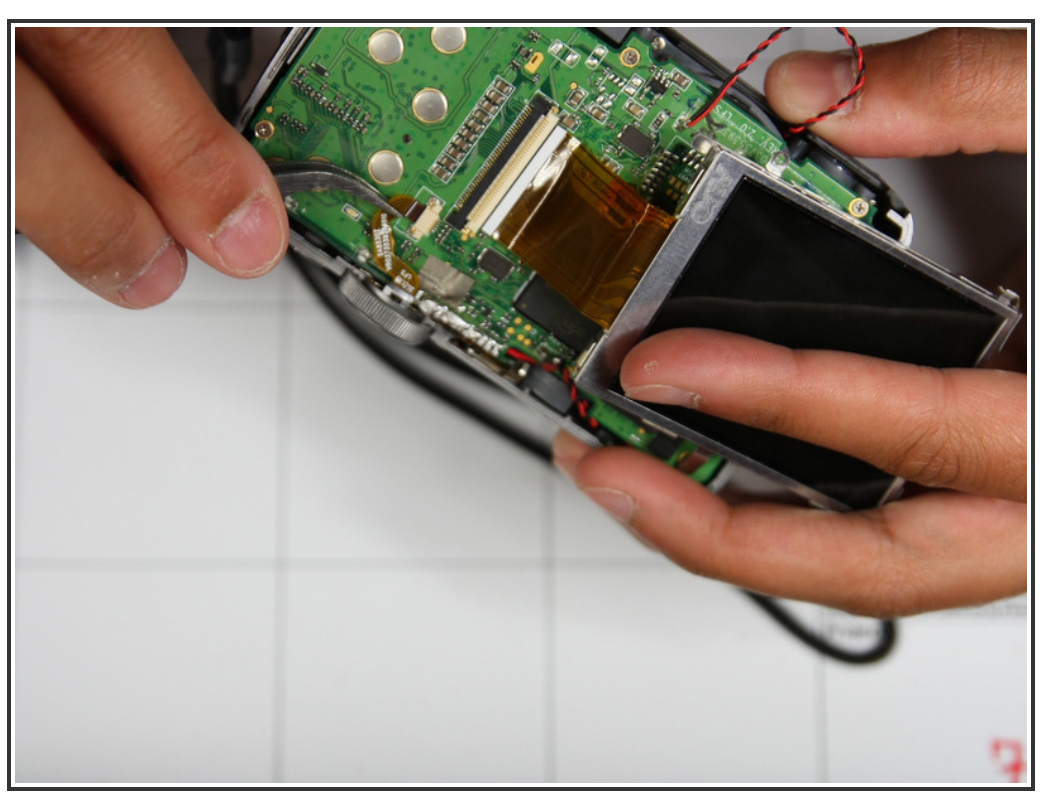

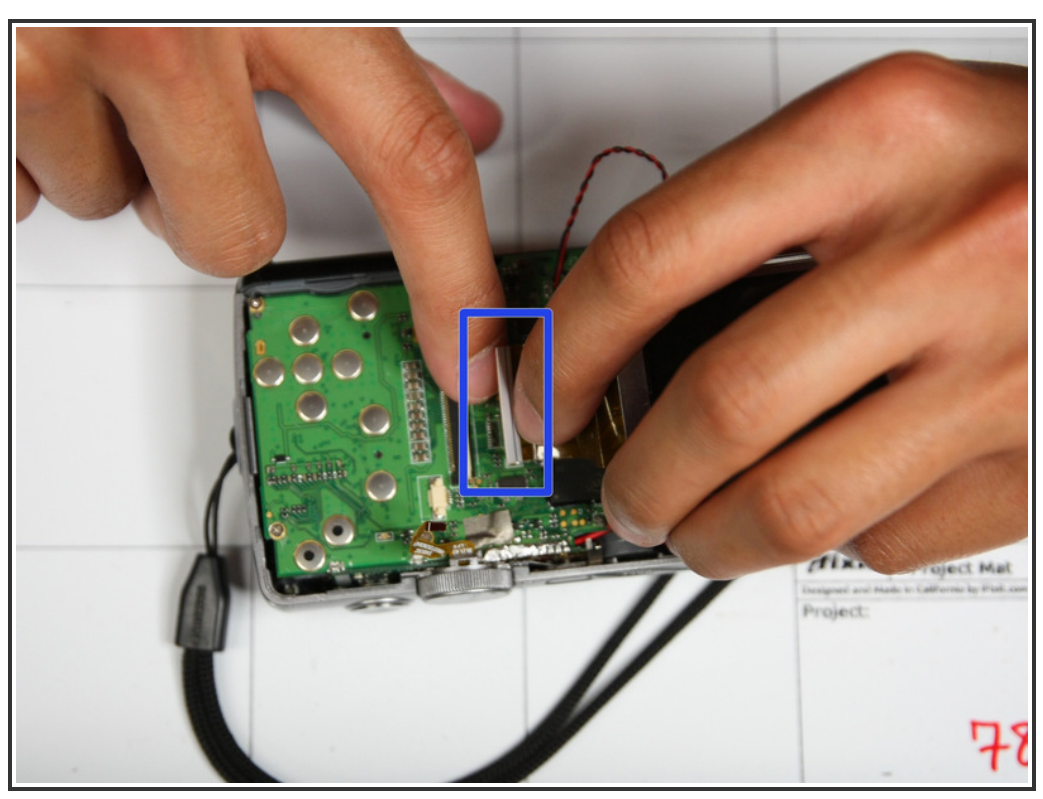

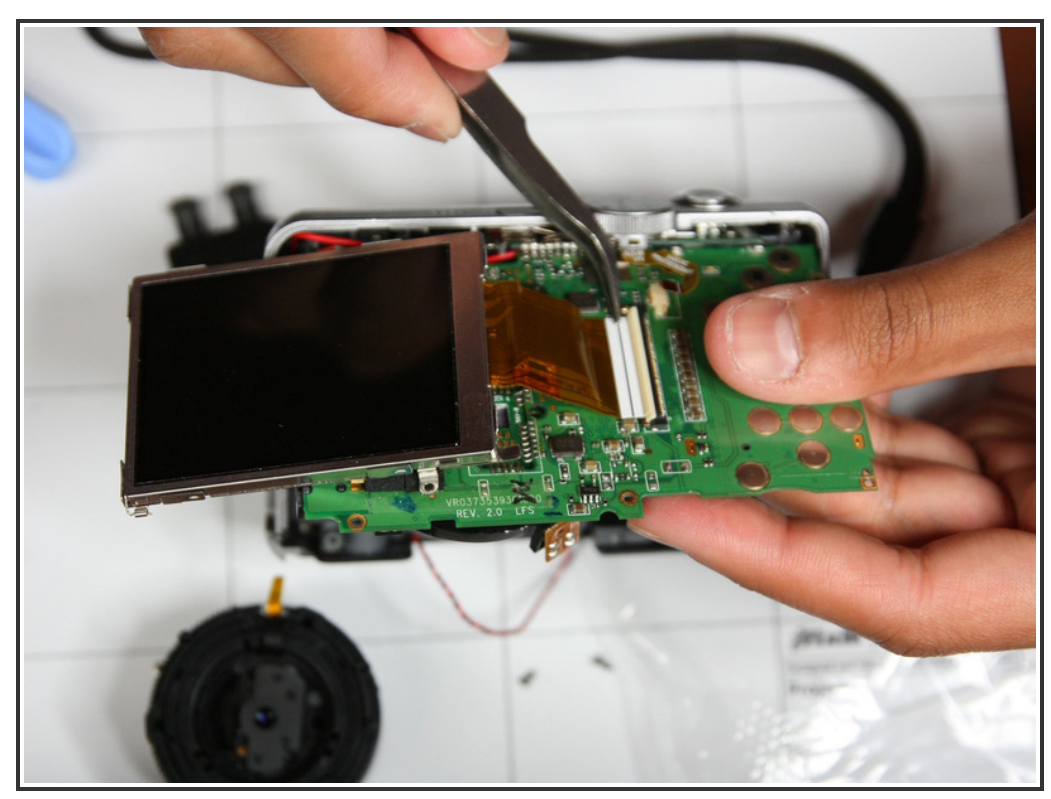

- Lift screen up such that orange circuit ribbon fully extends
- Flip white peg up noted by blue box
- Using tweezers gently remove orange circuit ribbon from white peg. Make sure white peg remains up otherwise ribbon may tear.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-15 07:50:47 AM.